




QuickHub

The universal Mid Centering Device

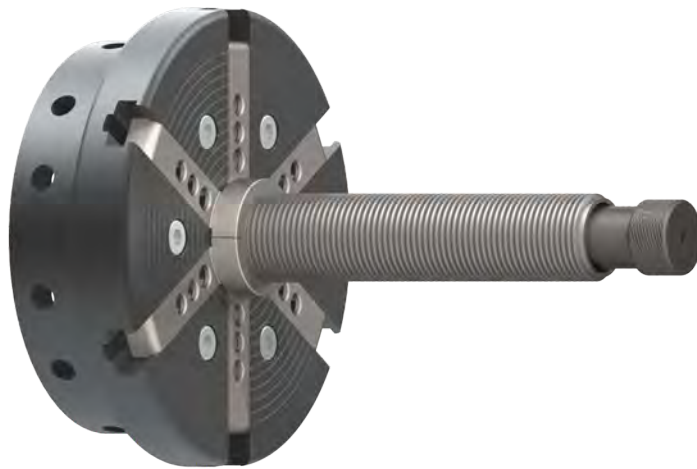

*Cylindrical
connection*



*Conical
connection*



*Open QuickHub,
max. clamping range 77.1 mm
without additional attachments*



*Application of the new
QuickHub on a tire.*

- Replaces all centering devices (for cars, OffRoad 4x4, light truck)
- fully adjustable variable centering from 53.5 mm - 171.5 mm* (*with additional attachments)
- For all common wheel balancers
- Time savings = no searching for matching centering devices
- no expenditure of energy required for centering
- no counteraction of spring tension
- faster than pneumatic or electro-mechanical clamping system
- Exact centering, tolerance free
- pre adjustment of hub diameter possible

Part #: 105 xxx 004
(with cylindrical connection)

Part #: 105 818 004
(with conical connection)




Scope of delivery

QuickHub with SoftGrip and 2 sets of additional attachments.

Clamping range from:

53.5 - 77.1 mm

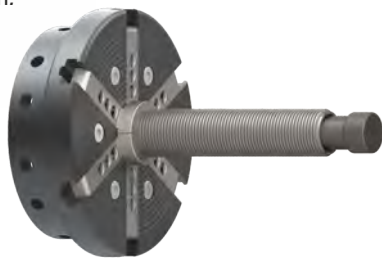

QuickHub



SoftGrip





Additional attachments


Additional attachments (suitable for cars and OffRoad 4x4)

Clamping range from:

① **74.9 - 98.5 mm** (6 pcs./set)

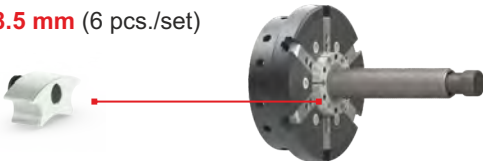

② **98.5 - 122.1 mm** (6 pcs./set)

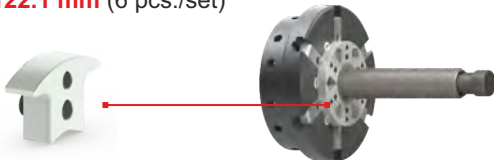

Application of the additional attachments on the QuickHub, minimum to maximum clamping range.


Optional accessories

Additional attachments (suitable for light trucks)

Clamping range from:


③ **123.5 - 147.1 mm** (6 pcs./set)

Part #: 100e008 037

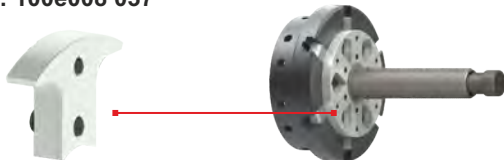

④ **147.9 - 171.5 mm** (6 pcs./set)

Part #: 100e008 036

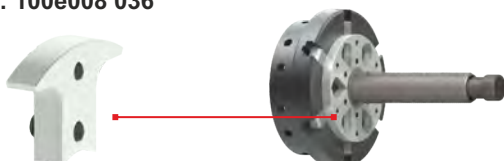

4 additional attachments for larger clamping ranges

There are four versions of additional attachments available to expand the clamping range of the QuickHub.

By quickly attaching the additional attachments, the clamping range increases up to 171.5 mm.

The two attachment sets with the clamping range 74.9 - 98.5 mm and 98.5 - 122.1 mm are included in the QuickHub.

The attachment sets with clamping range 123.5 - 147.1 mm and 147.9 - 171.5 mm are available optional. They fit for light truck wheels.